




# HDS-14A

## 4K Conditioning Splitter

If this doesn't look like any 4-Way HDMI Splitter you've ever seen, it's because it's not! Our 4-Way HDMI Conditioning Splitter is designed to Stabilize and correct HDMI signals that may have been compromised by non-conforming HDMI devices. Many HDMI products may not present a signal with correct EDID, "handshake," or HDCP protocols. As a result, you may experience intermittent or unsatisfactory display. We recognize that and solve most of these issues by establishing a proper "handshake" at the input to this device (with your source) so that your display will operate reliably.

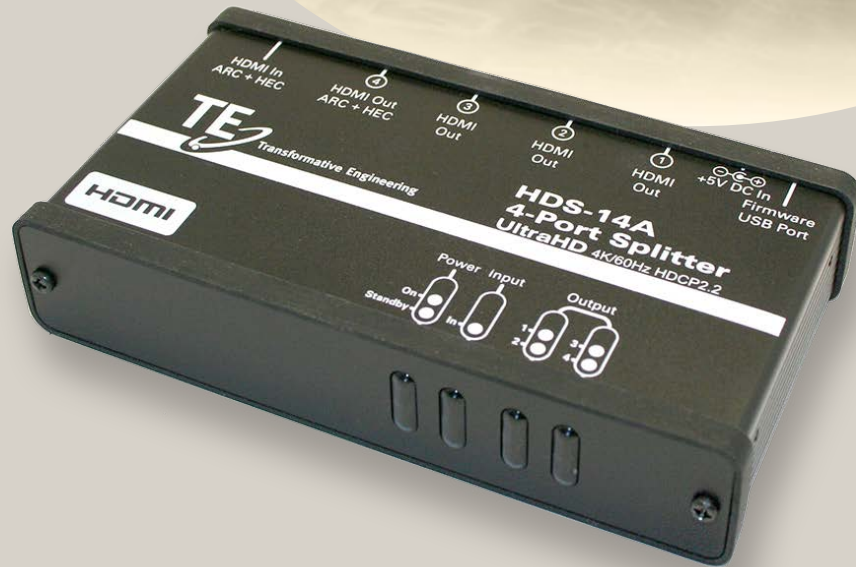

**HDMI®**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

This "splitter" supports ARC (Audio Return Path) and HEC (Home Ethernet Connection) through Output #4. All outputs support 3D, 2K x 4K, Deep Color, xV Color, High Speed transmissions, HDMI2.0, 4K/60Hz/4:4:4, HDR, and HDCP2.2. Also supported are all current HDMI Audio Formats including: Atmos, Dolby TrueHD, and DTS Master Audio. It is powered by an included 5V Power Supply. In addition, we provide a USB port for future firmware updates.

There are no buttons, dials, or switches to set or re-set. The HDS-14A will detect the EDID of each of the 4 connected displays when it is powered up and the best image package that can be reproduced by all of the displays. This sets you up with a clean, efficient 4-Display System while assuring the HDCP signals are correctly handled - giving you reliable, consistent HDMI connections at start-up and all day long.



781-769-6410  
Norwood, MA 02062 USA  
[www.transmotiveengineering.com](http://www.transmotiveengineering.com)

# HDS-14A

4K Conditioning  
Splitter

## Splitter Stabilizes and Corrects HDMI

- Rugged Shielded aluminum enclosure brushed anodized surface



- Rubber surrounds for short-protection and safety.

- Output feedback LED
- Input status LED
- Power status LED



- HDMI In ACR+HEC
- (3) Standard HDMI Outputs
- (1) HDMI Output w/ ARC+HEC
- Power Input
- USB firmware update port



### HDS-14A Specifications

INPUT: HDMI (1)

OUTPUT: HDMI (4)

Output #4: ARC, HEC, Stabilization Circuit – 3D, HDMI2.0, 4K/60Hz/4:4:4, HDR10, HDCP2.2

Output #1-3: Stabilization Circuit - 3D, HDMI2.0, 4K/60Hz/4:4:4, HDR10, HDCP2.2

POWER IN: 5V DC, .5A Power Supply included

CASE STYLE: Extruded Aluminum, Fully shielded and grounded

WARRANTY: 3 Years Parts & Labor



Adopter Member of HDBase-T Alliance  
Authorized HDMI Adopter

781-769-6410  
Norwood, MA 02062 USA  
[www.transformativeengineering.com](http://www.transformativeengineering.com)